

PRODUCT RANGE 2022


Husqvarna®



CHARGED WITH POSSIBILITIES

New Husqvarna K 1 PACE high power battery cutter: Less vibrations and zero direct emissions.

REDEFINE YOUR POTENTIAL WITH THE NEW DXR RANGE

Husqvarna DXR – with improved efficiency.

SUCCEED WITH YOUR FLOOR PROJECT

Husqvarna Hipertrowel™ floor polishing system.

A NEW KIND OF POWER!

Ready when – and where – you are Try our new Husqvarna K1 Pace high power battery cutter. Feel how it sets you free and allows your skills to shine. Enjoy the cleaner air, low vibrations and a more quiet workday. Knowing you have the power to get the job done. Experience all the ways this machine is charged with possibilities.

MORE CONTROL. MORE POWER. MORE YOU.

Your potential is our driving force. It inspires us to design technology that develops your professional skills. You know exactly how to get the job done – and our solutions let you to do it smarter, safer and with new levels of power. We're proud to present a whole new range of Husqvarna DXR robots that give you much more than power. Get ready to experience DXR control like never before.

DELIVERING MORE POWER AND PERFORMANCE

The electrical power has increased, more than 20% in average on all four DXR models. Hydraulic flow is over 10% higher. This enables faster cutting, crushing and breaking, letting you get the job done faster.

OPERATING WITH LIVE SURVEILLANCE

The remote control delivers live information about machine status, incoming per phase current and voltage, temperature as well as active faults and operating time without the need of external measuring equipment. For instant machine status, increased uptime and productivity.

REDEFINING YOUR POTENTIAL

In combination with the skills you already have, our new machines will provide more power, more control and ultimately, high quality results. Let the new DXR range redefine the potential of the person operating them – you.

PETROL POWER CUTTERS



HUSQVARNA K 1270
119 cc, 5.8 kW, 13.3/13.7 kg, blade size 350/400 mm, cutting depth 118/145 mm.



NEW
HUSQVARNA K 1270 SMARTGUARD
119 cc, 5.8 kW, 15.1 kg, blade size 400 mm, cutting depth 118/145 mm.



HUSQVARNA K 770 / K 770 WITH OILGUARD
74 cc, 3.7 kW, 10 / 10.1 kg, blade size 300/350 mm, cutting depth 100/125 mm.



NEW
HUSQVARNA K 770 SMARTGUARD
74 cc, 3.7 kW, 10.8/11.1 kg, blade size 300/350 mm, cutting depth 100/125 mm.



HUSQVARNA K 970
94 cc, 4.8 kW, 11/11.6 kg, blade size 350/400 mm, cutting depth 125/155 mm.



NEW
HUSQVARNA K 970 SMARTGUARD
94 cc, 4.8 kW, 11.9/12.8 kg, blade size 350 / 400 mm, cutting depth 125 / 155 mm.



HUSQVARNA K 770 VAC
74 cc, 3.7 kW, 11.0 kg, blade size 305 mm, cutting depth 123 mm.



HUSQVARNA K 770 DRY CUT
74 cc, 3.7 kW, 12.0 kg, blade size 305 mm, cutting depth 123 mm.



HUSQVARNA K 970 RING
94 cc, 4.8 kW, 13.8 kg, blade size 370 mm, cutting depth 270 mm.



HUSQVARNA K 760 CUT-N-BREAK
74 cc, 3.7 kW, 11.1 kg, blade size 230 mm, cutting depth 400 mm.



HUSQVARNA K 970 CHAIN
94 cc, 4.8 kW, 9.7 kg, bar size 350 mm, cutting depth 400 mm.

RAIL CUTTER



HUSQVARNA K 1270 RAIL
119 cc, 5.8 kW, 20.5/21.2 kg (incl. RA10), blade size 350/400 mm, cutting depth 118/145 mm.

HYDRAULIC POWER CUTTERS



HUSQVARNA K 3600 MK II
150 bar/40 l/min, 4.3 kW, 8.3 kg, blade size 370 mm, cutting depth 270 mm.

HUSQVARNA K 2500
150 bar/40 l/min, 5.2 kW, 8.3 kg, blade size 400 mm, cutting depth 145 mm.

RESCUE CUTTERS



HUSQVARNA K 970 RESCUE
94 cc, 4.8 kW, 11 kg, blade size 350 mm, cutting depth 125 mm.



HUSQVARNA K 770 RESCUE
74 cc, 3.7 kW, 9.6 kg, blade size 300 mm, cutting depth 100 mm.

ELECTRIC POWER CUTTERS



HUSQVARNA K 7000
230/400 V, 5.5 kW (3-phase) / 3 kW (1-phase), 9.8 kg, blade size 400 mm, cutting depth 155 mm.

NEW

HUSQVARNA K 7000 SMARTGUARD
230 / 400 V, 5.8 kW (3-phase) / 3 kW (1-phase), 5.1 kg, blade size 400 mm, cutting depth 145 mm.



HUSQVARNA K 7000 RING
230/400 V, 5.5 kW (3-phase) / 3 kW (1-phase), 13.1/12.4 kg, blade size 350/425 mm, cutting depth 270/325 mm.



HUSQVARNA K 7000 CHAIN
230/400 V, 5.5 kW (3-phase) / 3 kW (1-phase), 9.1 kg, bar size 450 mm, cutting depth 450 mm.



HUSQVARNA K 4000
230/120/110 V, 2.700/1.800/2.200 W, 8.5 kg (incl. Vac attachment 1 kg), blade size 350 mm, max. cutting depth 125 mm.



HUSQVARNA K 4000 CUT-N-BREAK
230/120/110 V, 2.700/1.800/2.200 W, 8.9 kg, blade size 230 mm, cutting depth 400 mm.



AIR POWER CUTTER



HUSQVARNA K 40
7 kp/cm², 3.2 kW, 9.9 kg, blade size 350 mm, cutting depth 125 mm.

CUTTING TROLLEYS

HUSQVARNA KV 9/12
Cutting trolley designed for K 970 and K 1270. Water tank 13.3 l.



HUSQVARNA KV 7
Cutting trolley designed for K 760 and K 770. Water tank 13.3 l.

POWER CUTTERS – ACCESSORIES



K 3000/K 4000 VAC ATTACHMENT
Ideal dust collection enables you to cut without water. Fits K 3000 Wet/Vac and K 4000.



HUSQVARNA RA 10
Cutting attachment for the K 1260 Rail, 5.3 kg.



PIPE CLAMP KIT
For use with Husqvarna K 970 Ring and Chain and K 6500 Ring and Chain. A convenient accessory for producing straight, precise cuts in concrete and iron pipes.

PRESSURIZED WATER TANK PLUS HOSE
Holds 13.3 litres, complete with a 3-metre hose.



DRILL MOTORS

PRIME



HUSQVARNA DM 700
6000/3000 W, 3-phase/1-phase, electric, recommended drill diameter 80–600 mm, 14 kg.



HUSQVARNA DM 400/DM 430
3200 W, 1-phase, electric, recommended drill diameter 55–450 mm, 14/15.5 kg.



HUSQVARNA DM 220
1850 W, 1-phase, electric, recommended drill diameter 150 mm, handheld 80 mm, 7.5 kg.



HUSQVARNA DM 280
2700 W, 1-phase, electric, recommended drill diameter, low speed 50–350 mm, high speed 25–250 mm, 13 kg.



HUSQVARNA DM 406 H
120/230/340/580/980/1400 rpm, recommended drill diameter 0–650 mm, 16 kg.



HUSQVARNA DM 230
1850 W, 1-phase, electric, recommended drill diameter 150 mm, handheld 80 mm, 7 kg.



HUSQVARNA DM 200
2000 W, 1-phase, electric, recommended drill diameter 25–100 mm, 6.4 kg.

DRILL STANDS



HUSQVARNA DS 900
Ø 900 mm, travel length 950 mm, 24 kg.



HUSQVARNA DS 500
Ø 500 mm, length 706 mm, 18 kg.



HUSQVARNA DS 250/DS 250 SINGLE SPEED
Ø 250 mm, travel length 685 mm, 16 kg.



HUSQVARNA DS 150
Ø 150 mm, travel length 495 mm, 15.5 kg.

HUSQVARNA DS 50 COMBI
Ø 300 mm, travel length 1090 mm, 21 kg.

HUSQVARNA DS 50 GYRO
Ø 350 mm, travel length 670 mm, 56 kg.

HUSQVARNA DS 40 GYRO
Ø 150 mm, travel length 600 mm, 30 kg.



HUSQVARNA C 3000
63 mm, 37 l, 22 kg.



HUSQVARNA C 5500
76 mm, 100 l, 67 kg.

DRILL MOTORS WITH STANDS

HUSQVARNA DMS 240
2400 W, 1 phase, electric, max Ø 250 mm, 20.4 kg.



HUSQVARNA DMS 160 AT/A
1550 W, 1 phase, electric, max Ø 120 mm, 12/10.5 kg.

TILE SAWS

HUSQVARNA TS 60
1800 W, max Ø 254 mm, max cutting depth 78/45 mm, 36 kg.



HUSQVARNA TS 73 R
1000 W, max Ø 230 mm, max cutting depth 50/100 mm, 47 kg.



HUSQVARNA TS 66 R
800 W, max Ø 200 mm, max cutting depth 40 mm, 41 kg.



HUSQVARNA W 70
1.2 kW, 220–230 V, 5 A, 200 m³/h, 34 kg.



HUSQVARNA W 70 P
1.2 kW, 220–230 V, 8 A, 200 m³/h, 44 kg.



HUSQVARNA W 250 P
1.2 kW, 220–230 V, 7 A, 160 m³/h, 27 kg.

MASONRY SAWS

HUSQVARNA TS 400 F
1500/2200 W, max Ø 400 mm, max cutting depth 125/230 mm, 96 kg.



HUSQVARNA TS 300 E
2200 W, max Ø 300 (350) mm, max cutting depth 80 (100) mm, 82 kg.



HUSQVARNA TS 350 E
1500/2200 W, max Ø 350 mm, max cutting depth 100 mm, 92 kg.

HUSQVARNA TS 100 R
2200 W, max Ø 350 mm, max cutting depth 105 mm, 106 kg.



HUSQVARNA A 2000
0.75 kW, 220–230 V, 3.3 A, 38 kg.



HUSQVARNA A 1000
0.285 kW, 220–230 V, 1.2 A, 18 kg.

HUSQVARNA DIAMOND TOOLS COME IN THREE PERFORMANCE CATEGORIES:

GOLD

Husqvarna diamond tools at Gold level are developed for highly demanding professionals working on specialist applications and intensive jobs, looking for maximum cutting speed and wear resistance in heavy cutting and drilling. They provide maximum cutting speed and wear resistance in heavy cutting, grinding and drilling.

SILVER

Husqvarna diamond tools at Silver level are developed for demanding professionals working on a variety of quick jobs during a workday in various all-round applications. They provide high cutting speed and wear resistance in all cutting, grinding and drilling.

BRONZE

Husqvarna diamond tools at Bronze level are developed for demanding professionals working occasionally with cutting and drilling jobs, looking for the best value between performance and price in all common cutting and drilling applications.

DIAMOND BLADES WITH SMARTER FEATURES

To increase safety and performance when operating a handheld power cutter, Husqvarna now introduces new smarter features in the Elite-Cut, Vari-Cut and Tacti-Cut series. The smarter features give the operator a clear and immediate overview of the blade's wear, side clearance, direction of rotation and intended application.

DIAMOND TOOLS FOR HANDHELD POWER CUTTERS



G HUSQVARNA ELITE-CUT

Gold level blades with Exo-Grit segments for smooth, efficient cut also in reinforced concrete. Diameters 300–400 mm in several versions optimised for the material to be cut. Providing 20% faster cut and 10% higher speed.

*According to internal field test compared to previous Elite-Cut series.



S HUSQVARNA VARI-CUT

Silver level blades with high cutting speed and a good balance between investment cost and cost per cut square metre. Diameters 300–400 mm in five versions depending on the application.



B HUSQVARNA TACTI-CUT

Bronze level blades optimised for less intensive professional cutting in most materials. Diameters 300–350 mm in five versions depending on the application.

SPECIAL APPLICATIONS



S HUSQVARNA RESCUE BLADES

Blades with brazed diamond technology, for all-round free cutting in materials as concrete, rubber, brick, metal, steel etc. Suitable for rescue applications. Diameters 300–400 mm.



S HUSQVARNA ABRASIVE DISCS

Top-grade abrasive discs that can cut practically any material, such as stone, steel and railway rail. Diameters 300–400 mm.



G HUSQVARNA ELITE-RING R10

Gold level ring saw blades designed for optimal cutting speed, even in the hardest and most reinforced concrete. Available in three hardness levels. Also available in Pre-Cut version with 6.0 mm wide segments. Diameter 370 and 430 mm.




S HUSQVARNA VARI-RING R20

Silver level ring saw blades available in three hardness levels. Diameter 370 mm.



G CUT-N-BREAK BLADE

For the K760/K3000 Cut-n-Break. Gold level blades with segment shape that produces excellent cutting characteristics and performance. Available in three hardness levels.



S HUSQVARNA VARI-CHAIN

A range of professional, premium and quality chains for sawing in reinforced concrete and other construction materials in different hardness.



G HUSQVARNA ELITE-CHAIN

Gold level diamond chains equipped with high-performing, wear-resistant sandwich segments, providing long life in specific cutting applications.



G HUSQVARNA ELITE-GUIDE BAR

Guide bars developed to be the optimal choice of cutting equipment for any Husqvarna concrete chainsaw. Fits on both new and older models of Husqvarna concrete chainsaws.

DIAMOND TOOLS FOR ANGLE GRINDERS



G HUSQVARNA ELITE-CUT

Gold level blades providing maximum cutting speed and life. Diameters 115–230 mm in five versions depending on the application.



G HUSQVARNA ELITE-CUT S6 X-LOCK

Gold level blades designed with continuous rim ideal when cutting on high precision materials such as tiles. X-lock design for safer and securer mount without tools.



G HUSQVARNA ELITE-CUT S50 X-LOCK

Gold level segmented blades ideal when cutting blocks or bricks. Speed bridge reduces lateral friction, better cooling and dust evacuation. X-lock design for safer and securer mount without tools.



S HUSQVARNA VARI-CUT

Silver level blades with high cutting speed and wear resistance in all materials. Diameters 115–230 mm in nine versions depending on the application.



B HUSQVARNA TACTI-CUT

Bronze level blades optimised for less intensive professional cutting in most materials. Diameters 115–230 mm in four versions depending on the application.



S HUSQVARNA VARI-GRIND

Silver level cup wheels for professional use, providing efficient grinding in all materials. Diameters 100–180 mm in four versions depending on the application.



B HUSQVARNA TACTI-GRIND

Bronze level cup wheels developed for less intensive use, offering good price performance. Diameters 115–180 mm in three versions depending on the application.

DIAMOND DRILL BITS



NEW

G S HUSQVARNA ELITE-DRILL TW AND VARI-DRILL TW SERIES

A new range of thin-walled core drill bits specially designed for battery-powered and low-powered drill motors. Experience a faster and smoother drilling operation with quick and precise start. Available for both wet and dry drilling. Diameters 10–100 mm.

G HUSQVARNA ELITE-DRILL SERIES

Gold level drill bits delivering smooth, fast drilling in demanding applications. Available for various materials like heavily reinforced concrete, hard aggregate and abrasives. Diameters 92–350 mm.



S HUSQVARNA VARI-DRILL

Silver level drill bits with great performance and durability in heavy duty applications. Diameters from 18–300 mm in two versions depending on the application. 1 1/4" connector.

S HUSQVARNA VARI-DRILL DRY

Lightweight drill bits for dry indoor drilling by specialist professionals. Two versions available. Vacuum-brazed segments for drilling tiles and natural stone. Laser-welded segments for drilling concrete, bricks, and cement blocks. Diameters 37–200 mm.



B HUSQVARNA TACTI-DRILL

Bronze level drill bits with a good price/performance value for non intensive use in heavier applications. Diameters from 52–300 mm. 1 1/4" connector.

DIAMOND BLADES FOR MASONRY AND TILE SAWS



G HUSQVARNA ELITE-CUT

Gold level blades for fast, smooth cutting in most construction materials, at the lowest cutting cost per square metre. Diameters 300–1000 mm, in standard or silent version, depending on model and application.

WALL SAWS




HUSQVARNA WS 482 HF

High frequency, wireless remote control, diamond blade 600–1600 mm, 28 kg, cutting depth 730 mm.



HUSQVARNA WS 440 HF

High frequency, wireless remote control, diamond blade 600–1200 mm, 25 kg, cutting depth 530 mm.



HUSQVARNA WS 220

High frequency, wireless remote control, diamond blade 500–900 mm, 19 kg, cutting depth 395 mm.



HUSQVARNA WSC 40

Attachment that converts your Husqvarna WS 482 HF and WS 440 HF from blade to chain sawing. Max cutting depth, 400 mm, 19 kg.

REMOTE DEMOLITION

NEW

HUSQVARNA DXR 315

27 kW, 2020 kg, reach 5.5/5.2 m up/forward incl. tool.

NEW

HUSQVARNA DXR 305

27 kW, 1960 kg, reach 5.5/5.1 m up/forward incl. tool.

NEW

HUSQVARNA DXR 275

24 kW, 1750 kg, reach 4.8/4.5 m up/forward incl. tool.

NEW

HUSQVARNA DXR 145

18.5 kW, 985 kg, reach 4.4/3.7 m up/forward incl. tool.

WIRE SAWS

HUSQVARNA CS 2512

Wire speed 20 or 25 m/s, magazine capacity 12 m (ready to use 15 m), 150 kg.



HUSQVARNA CS 10

Wire speed 24 m/s, magazine capacity 10 m, 138/135 kg.

POWER PACKS

PRIME

PRIME



HUSQVARNA PP 492

20 kW, 25 kg.



HUSQVARNA PP 220

6.5 kW, 10 kg.



HUSQVARNA PP 70

3-phase/1-phase 6.5 kW, 18 kg.

HUSQVARNA PP 455 E

65 l/min, 230 bar, 25 kW, 139 kg.



HUSQVARNA PP 325 E

40 l/min, 140 bar, 9.3 kW, 95 kg.



HUSQVARNA PP 518

20, 30, 40 l/min, 140 bar, 10.4 kW, 145 kg.

REMOTE DEMOLITION – TOOLS



HUSQVARNA DCR 300 AND DCR 100

For Husqvarna demolition robots. With these powerful crushers you can easily crush a 400 mm thick concrete wall, staircases, pillars etc.



HUSQVARNA DSS 200

For Husqvarna demolition robots. Steel shearer for demolition of structures, piping, process vessels and tanks. Ideal in sensitive areas such as process industries.



HUSQVARNA BUCKETS

Available in three sizes. For DXR 140: Standard 52 cm/55 liters. Wide 77 cm/60 liters. Narrow 30 cm/40 liters. All other DXRs: Standard 52 cm/85 liters. Wide 77 cm/105 liters. Narrow 30 cm/40 liters.

FLOOR SAWS



HUSQVARNA FS 7000 DL

Diamond blade max 1500 mm, 1338 kg, cutting depth 625 mm, 55.4 kW*.

HUSQVARNA FS 7000 D

Diamond blade max 1000 mm, 1032 kg, cutting depth 411 mm, 55.4 kW*.

HUSQVARNA FS 5000 D

Diamond blade max 900 mm, 771 kg, cutting depth 374 mm, 35.5 kW*.

HUSQVARNA FS 4800 D

Diamond blade max 900 mm, 680-695 kg, cutting depth 381 mm, 35 kW*.

HUSQVARNA FS 3500 G

Diamond blade max 750 mm, 419 kg, cutting depth 311 mm, 27.5 kW*.



NEW

HUSQVARNA FS 600 E

Diamond blade max 600 mm, cutting depth 240 mm, 178 kg, 7.5 kW*.

HUSQVARNA FS 500 SERIES

Diamond blade max 600/500 mm, cutting depth 241/179/192 mm, 231/197/145 kg. FS 524, petrol, 15.5 kW*. FS 513, petrol, 8.7 kW*. FS 500 E, electric, 7.5 kW*.

HUSQVARNA FS 400 SERIES

Diamond blade max 500 mm, cutting depth 189 mm, 163 kg. FS 413, petrol, 8.7 kW*. FS 410 D, diesel, 6.6 kW*.

HUSQVARNA FS 400 LV

Diamond blade max 450 / 500 mm, cutting depth 162 / 189 mm, 99 kg, 8.7 kW*.

HUSQVARNA FS 300 SERIES

Diamond blade max 350 mm, cutting depth 122/125 mm, 64/54 kg. FS 309, petrol, 6.6 kW*. FS 305, petrol, 3.6 kW*.

ULTRA EARLY ENTRY™ SAWS

HUSQVARNA SOFF-CUT 4200

Diamond blade max 350 mm, cutting depth max 76 mm, 257 kg, 17.2 kW*.

HUSQVARNA SOFF-CUT 150

Diamond blade max 150 mm, cutting depth max 30 mm, 40 kg, 4.0 kW*.

HUSQVARNA SOFF-CUT 4000

Diamond blade max 350 mm, cutting depth max 70 mm, 191 kg, 14.9 kW*.

HUSQVARNA SOFF-CUT 2000

Diamond blade max 250 mm, cutting depth max 38 mm, 144 kg, 6.5 kW*.

NEW

HUSQVARNA DE 110

1.1 kW, 220-240 V, 5 A, 240 m³/h, 25 kg

NEW

HUSQVARNA DE 120

2.2 kW, 220-240 V, 15 A, 480 m³/h, 39 kg

DUST AND SLURRY MANAGEMENT

NEW

HUSQVARNA DE 110 S

0.9 kW, 220-240 V, 4 A, 215 m³/h, 25 kg

HUSQVARNA T7500

5.5 kW, 380-415 V, 16 A, 600 m³/h, 206 kg.

HUSQVARNA HTC D80

7.5 kW, 230-400 V, 16.7 A, 700 m³/h, 272 kg

HUSQVARNA HTC D60

5.5 kW, 230-480 V, 15 A, 530 m³/h, 179 kg

HUSQVARNA T10000

11 kW, 380-415 V, 32 A, 900 m³/h, 336 kg.

HUSQVARNA S36
3.6 kW, 220-230 V, 14 A, 600 m³/h, 65 kg.

DIAMOND BLADES FOR WALL SAWS



G HUSQVARNA W 1500

Gold level blades for wall saws, designed to deliver where it matters. Provide reliable, smooth cutting with long blade life on a wide window of application. The W 1500 series also include Z-edge blades with increased sturdiness and life span. Diameters 600–1500 mm.



S HUSQVARNA W 1100

Silver level blade for Husqvarna hydraulic and electric wall saws with an ideal design. Fits other machines as well. Diameters 600–1200 mm in three versions depending on the application.

DIAMOND BLADES FOR HIGH- AND MID-POWERED FLOOR SAWS



G HUSQVARNA F 1500 SERIES

Gold level blades for floor saws, delivering superior performance. Available in versions optimised for efficient cutting in cured concrete, hard concrete, and asphalt. Diameters 500–1500 mm.




G HUSQVARNA F 600

Gold level blades for machines with motors of 25–50 kW. Diameters 300–1200 mm in four versions depending on the application.



G HUSQVARNA L 600

Gold level blades for slot cutting and traffic loops with sandwich design. Available in two versions with 6, 8 or 10 mm segment widths. Diameters 350–450 mm.



G HUSQVARNA F 500

Gold level blades with laser welded segments, optimised for Husqvarna FS 3500 G as well as electric floor saws. Diameters 500–800 mm.

DIAMOND BLADES FOR LOW-POWERED FLOOR SAWS



G HUSQVARNA ELITE-CUT

Gold level blades with Exo-Grit segments for smooth, efficient cuts also in heavily reinforced concrete. Diameters 300–600 mm in several versions optimised for the material to be cut.



S HUSQVARNA VARI-CUT


Silver level blades with high cutting speed and wear resistance. Diameters 300–500 mm in three versions depending on the application.



B HUSQVARNA TACTI-CUT

Bronze level blades optimized for less intensive professional cutting in most materials. Diameters 300–400 mm in three versions depending on the application.

DIAMOND BLADES FOR EARLY ENTRY SAWS



G HUSQVARNA SOFF-CUT BLADES

Patented gold level blades, supplied with skid plate. They are developed and tested for aggregate conditions. Soft-Cut blades are top quality and are designed specifically for the Soft-Cut system. Diameters 150–350 mm in three different series.

DIAMOND WIRES

ELITE-WIRE, VACUUM BRAZED RANGE

Our wires for demanding applications, cutting pure steel or alloys and highly reinforced concrete. Delivers excellent performance/life balance.



ELITE-WIRE, HYBRID RANGE

Our wires for wet cutting in medium to high reinforced concrete. Operators can optimise the cutting efficiency by choosing speed or life for the diamond wire.



VARI-WIRE, SINTERED RANGE

Our wires for cutting medium reinforced concrete. Delivers good performance/life balance in all-round construction, demolition and refurbishing applications.



DIAMOND CHAINS FOR WALL SAWS



G HUSQVARNA DIAMOND CHAINS AND GUIDE BAR

Gold level diamond chains optimised for use with WSC 40, developed for sawing in reinforced concrete and other construction materials with different hardness.

CONCRETE PLACEMENT EQUIPMENT

POWER UNITS FOR AX/VIBRASTAR



HUSQVARNA CF 67T

Output 42V–3–200 Hz, 4.7 kVA, 67A, 70 kg, 4 outlets.



HUSQVARNA CF 25

Output 42V–3–200 Hz, 1.8 kVA, 25A, 31 kg, 2 outlets.



HUSQVARNA CF 11

Output 42V–3–200 Hz, 0.8 kVA, 11A, 18 kg, 1 outlet.

HIGH FREQUENCY ELECTRIC VIBRATORS

HUSQVARNA SMART VIBRATORS

1-phase electric, Ø 40/48/56/65 mm, hose length 5, 8, 10 m, 13.1–18.5 kg.

HUSQVARNA SMART-E VIBRATORS

1-phase electric, Ø 40/48/56 mm, hose length 0.5 m, 12–14.8 kg.

HUSQVARNA AX VIBRATORS

42V–3–200 Hz, Ø 36–90 mm, hose length 5, 8, 10 m, 13.1–18.8 kg.



HUSQVARNA VIBRASTAR

42V–3–200 Hz, Ø 40/50/60 mm, hose length 5 m, 8.4–15 kg.

MODULAR FLEX-SHAFT VIBRATORS



HUSQVARNA AME 600

1-phase electric, 0.6 kW, 1.9 kg.



HUSQVARNA AME 1600

1-phase electric, 1.6 kW, 6.1 kg.




HUSQVARNA SUPERFLEX SERIES

Flexible shafts 1/2/3/4 m, 2.4–7.3 kg.




HUSQVARNA HA SERIES

Ø 25/35 mm, hose lengths: 1/2/3 m, 2.8–7.6 kg.



HUSQVARNA AT SERIES

Vibrator heads, Ø 29/39/49/59 mm, 1.3–3.9 kg.



MECHANICAL VIBRATORS



HUSQVARNA AMG 3200

Drive unit for AA and AZ vibrators, 2.8 kW, 30 kg.



HUSQVARNA AMD 3000

Drive unit for AA and AZ vibrators, 3 kW–46 kg.



HUSQVARNA AA AND AZ SERIES

Hose length 6/4.8 m, 5 diameters 25–75 mm.

PNEUMATIC VIBRATORS



HUSQVARNA AY SERIES
9 diameters, 26–155 mm, hose length
2 or 4 m, 4–28 kg.

EXTERNAL VIBRATORS

**HUSQVARNA PNEUMATIC
AND ELECTRIC VIBRATORS**
14 versions, Speed 3000–9350 rpm,
max. centrifugal force 500–31500 N.



WALK-BEHIND SCREEDS



**HUSQVARNA
BV 20 H**
2.0 m, 7.5 kg.

HUSQVARNA BV 30
1 kW, centrifugal clutch, petrol, 14 kg.

HUSQVARNA BV 20 G
2.0×2.2–4 m (W×L), 0.7 kW,
petrol, 16.6 kg.

DOUBLE BEAM SCREEDS



HUSQVARNA BE 30
2.6 kW, 32 kg.

HUSQVARNA BE 20
0.45 kW, 37 kg.

HUSQVARNA BD 32/42/52/62
3.2, 4.2, 5.2, 6.2 m, 32–57 kg.

SCREED BLADES

HUSQVARNA BV 30 SCREED BLADE
1.8/2.4/3.0/3.6/4.2 m



SCREED SECTIONS

HUSQVARNA BT 90
0.5/0.75/1/2/3 m.



MODULAR SCREEDS



HUSQVARNA BT 90 E
3 kW, 20 m, 96 kg.




HUSQVARNA BT 90 G
5 kW, 20 m, 93 kg.



HUSQVARNA BT 90 P
25 m, 40 kg.

WALK BEHIND TROWELS

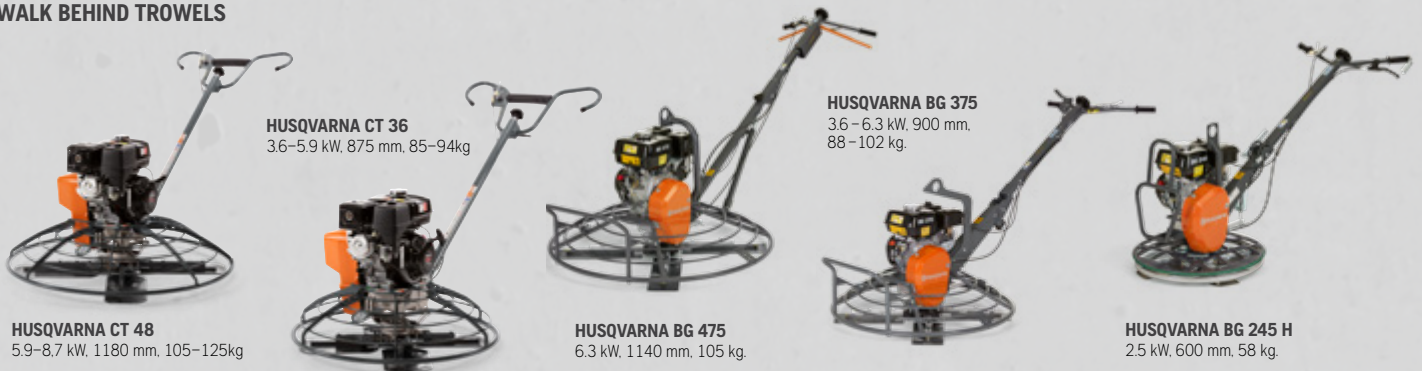

HUSQVARNA CT 36
3.6–5.9 kW, 875 mm, 85–94 kg

HUSQVARNA BG 375
3.6–6.3 kW, 900 mm,
88–102 kg.

HUSQVARNA CT 48
5.9–8.7 kW, 1180 mm, 105–125 kg

HUSQVARNA BG 475
6.3 kW, 1140 mm, 105 kg.

HUSQVARNA BG 245 H
2.5 kW, 600 mm, 58 kg.


ELECTRIC WALK BEHIND TROWELS



HUSQVARNA BG 245 E
1.5 kW, 600 mm, 60 kg.

HUSQVARNA BG COMBI
1.8–2.4 kW, 1020–850 mm,
88–86 kg.

TROWEL BLADES AND FLOATING DISCS

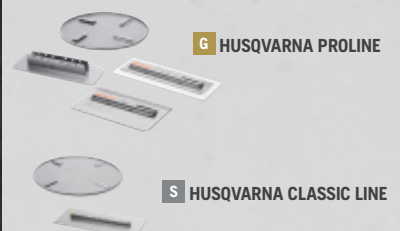

G HUSQVARNA PROLINE

S HUSQVARNA CLASSIC LINE

EVERYTHING YOU NEED TO SUCCEED WITH YOUR FLOOR PROJECT

Husqvarna can provide you with the equipment, diamond tools and expert advice you need, whether you're up to produce a premium-grade polished Husqvarna Superfloor™ or prepare a rough concrete surface for a new top layer. Contact us and find out how we can help!



Floor grinders



Diamond tools and SMHX tools



Multi tool



Chemicals

Dust extractors
Slurry vacuums



Application expertise
Service and support



HUSQVARNA RIDE-ON TROWELS

HUSQVARNA CRT 48

Ideal for finishing surfaces 1000–1900 m². Featuring a superior mechanical steering system and balanced power-to-weight ratio.



HUSQVARNA CRT 36

Ideal for finishing surfaces 250–1000 m². Featuring a superior mechanical steering system and balanced power-to-weight ratio.



HUSQVARNA CRT 48 PS

Ideal for finishing surfaces 1000–2300 m². The power steering enables accurate manoeuvring and virtually fatigue-free operation with two control modes to accommodate operator preference in varying site conditions.

USE YOUR RIDE-ON TROWEL TO POLISH CONCRETE

HUSQVARNA HIPERTROWEL™ FLOOR POLISHING SYSTEM

A fast and easy 6-step process to create polished concrete floors on large areas, by using a ride-on power trowel. Up to 1000 m² ready floor per day can be produced with this innovative solution, thanks to the flexible, passive Gyro driver and the magnetic, hassle-free mount of the new Hiperflex TRW diamond tools.

CHEMICALS FOR SURFACE PREPARATION



FLOOR GROUTING & HARDENING SYSTEM
GM 3000, GM +, Cure (K), Cure (L) Cure +



FLOOR PROTECTION SYSTEM
Premium Guard SB, Topical guard



FLOOR CLEANING SYSTEM
Clean and protect



EQUIPMENT FOR SURFACE PREPARATION

HUSQVARNA FLOOR GRINDERS



HUSQVARNA PG 830 RC
16.5 kW, 380/415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270 mm, 598 kg.



HUSQVARNA PG 830
16.5 kW, 380/415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270, 556 kg.



HUSQVARNA PG 690 RC
12.5 kW, 380/415 V, 3-phase, grinding width 640 mm, grinding disc 3 × 270, 598 kg.



HUSQVARNA PG 690
12.5 kW, 380/415 V, 3-phase, grinding width 640 mm, grinding disc 3 × 270, 502 kg.



HUSQVARNA PG 830 S
11 kW, 380/415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270, 497 kg.



HUSQVARNA HTC 8
12/15 kW, 380/415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270/4 × 270, 499/574 kg.



HUSQVARNA HTC 6
7.5 kW, 380/415 V, 3-phase, grinding width 600 mm, grinding disc 3 × 230/4 × 230 mm, 384/441 kg.



HUSQVARNA HTC 5
4.0/2.2 kW, 400/220 V, 3-phase/1-phase, grinding width 515 mm, grinding disc 3 × 230, 122/179 kg.




HUSQVARNA PG 540
4.0/2.2 kW, 400/220 V, 3-phase/1-phase, grinding width 515 mm, grinding disc 3 × 230 mm, 178/169 kg.



HUSQVARNA PG 510
4.0/2.2 kW, 400/220 V, 3-phase/1-phase, grinding width 515 mm, grinding disc 3 × 230 mm, 133/120 kg.



HUSQVARNA PG 450
2.2 kW, 230 V, 1-phase, grinding width 450 mm, grinding disc 3 × 180 mm, 109 kg.



HUSQVARNA PG 400
4 kW, 400 V, 3-phase, grinding width 400 mm, 115 kg.



HUSQVARNA PG 280
3/2.2 kW, 400/220 V, 3-phase/1-phase, grinding width 280 mm, 70 kg.



HUSQVARNA CG 200
2.2 kW, 220–240 V, 1-phase, grinding width 200 mm, 58 kg.



HUSQVARNA CG 200
3.6 kW, petrol, grinding width 200 mm, 54 kg.

TOOLS FOR SURFACE PREPARATION

REDI TOOL SYSTEM



HUSQVARNA ELITE-GRIND G1400 SERIES
Segments designed to offer optimal performance in all types of applications. Five different bonds. Grit range from 20 to 100.



HUSQVARNA SHARX™
For fast and easy removal of dense surfaces on hard-troweled concrete floors. The metal bond ensures that the pads stay opened and sharp even on the hardest top layers.



HUSQVARNA PIRANHA™
PCD tooling designed for fast and aggressive removal of many hard-to-remove coatings and screeds.



HUSQVARNA VARI-GRIND G600 SERIES
Silver level segments in an optimized range to facilitate tool selection. Three different bonds. Grit range from 20 to 100.



HUSQVARNA BUSH HAMMERING TOOLS
This series is developed for creating a bush hammered surface or to expose large aggregate, but also for creating a bush hammered profile perfect for high traction exterior surfaces.



HUSQVARNA EDGE GRINDING
Metal cup wheels and flexible pads for handheld grinding.



HUSQVARNA HIPERTROWEL™
Resin-bonded polishing tool on a flexible pad. Can be used both dry and wet for overlays and high quality polished concrete



HUSQVARNA CP 1200 SERIES
Ceramic tools with velcro backing for dry grinding and polishing of concrete. Grit range from 30 to 400.



HUSQVARNA P 1200 SERIES
Resin bond polishing pads can be chosen for high-end polishing. Grit range from 50 to 3000.



HUSQVARNA HIPERTROWEL™ FLOOR POLISHING SYSTEM
Polish large concrete floors fast with a ride-on power trowel and Hipertrowel TRW tool pads mounted on flexible Hipertrowel gyro drivers.



HUSQVARNA HIPERCLEAN PADS
Diamond impregnated maintenance pads, ideal for cleaning concrete polished floors.



HUSQVARNA SCARIFYING TOOLS
A gold level range of scarifying drums with different steel and carbide wheels that cover applications from coating removal to grooving.

EZ TOOL SYSTEM (HTC)

REMOVAL AND PREPARATION



EZ PREP SERIES
The EZ PREP series is designed for efficient removal and is available in four variants, depending on floor hardness.



T-REX SERIES
The T-REX series with PCDs is designed for aggressive removal and is available with EZ change attachment and as rings.



RAVAGER SERIES
This series is developed for creating a bush-hammered surface or to expose large aggregates.

METAL TOOLS TOOLS



THE SMHXX SERIES FOR CONCRETE GRINDING
The SMHXX series consists of five different tool series, covering all surfaces from soft/abrasive to extremely hard when nothing else works.



TOOL RINGS
The tool rings are suitable for our smaller grinders since fewer segments per tool means more weight and power into the floor.

RESIN TOOLS

SF SERIES
Our premium resin technology combined with optimised flexible design.



EZ SP SERIES
This high-performing concrete polishing tools series performs on all types of concrete.



TOOL HOLDER MULTI

A tool holder allowing to attach both Redilock and EZ change tools to your Husqvarna grinders. For ultimate versatility.



SPECIAL APPLICATIONS
Diamond Fenix and Diamond block series are designed for cementitious toppings resp applications requiring high temperature resistant resin.



EDGE GRINDING SERIES
This portfolio offers corresponding tools for what you can find for our planetary grinders. Everything from extreme removal to high gloss polishing.



WOOD GRINDING SERIES
The wood series is a single layer diamond tool specifically developed for efficient initial grinding of wood. Oiling pads are also available for post treatment.



NATURAL STONE SERIES
SGW and Diamond Xpress cover our natural stone portfolio specifically developed for wet resp dry processing.

COMPACTION EQUIPMENT

TAMPERS

**HUSQVARNA
LT 8005**
3 kW, 98–99 kg.



**HUSQVARNA
LT 6005**
2.7 kW, 69–70 kg.



**HUSQVARNA
LT 5005**
2.7 kW, 61–62 kg.



FORWARD PLATE COMPACTORS – SOIL

HUSQVARNA LF 130 LT
2.5–3.6 kW, 500 mm,
135–142 kg.



FORWARD PLATE COMPACTORS ASPHALT AND SOIL

HUSQVARNA LF 100 LAT
2.5–3.6 kW, 500 mm,
109–118 kg.



HUSQVARNA LF 80 LAT
3.6 kW, 420 mm, 95 kg.



HUSQVARNA LF 80 L
3.6 kW, 420 mm, 84 kg.



HUSQVARNA LF 75 LAT
3.6 kW, 420–500 mm,
95–97 kg.



HUSQVARNA LF 60 LAT
2.3 kW, 350 mm, 67 kg.



HUSQVARNA LF 50 L
2.3 kW, 320 mm, 53 kg.



FORWARD AND REVERSIBLE PLATE COMPACTORS

HUSQVARNA LH 804
11 kW, 820 kg.



HUSQVARNA LG 504
9.2 kW, 470–513 kg.



HUSQVARNA LG 400
6.2–8.3 kW, 398–436 kg.



HUSQVARNA LG 300
4.7–5.3 kW, 265–307 kg.



HUSQVARNA LH 700
11 kW, 780 kg.



**HUSQVARNA
LG 204**
3.1–4.1 kW,
211–251 kg.



**HUSQVARNA
LG 164**
3.1–3.6 kW,
148–185 kg.



ROUND PLATE COMPACTOR

NEW

**HUSQVARNA
LX 95**
3.6 kW, 430 mm,
100 kg.



**HUSQVARNA
LX 90**
3.6 kW, 450 mm,
96 kg.



DOUBLE DRUM ROLLERS



HUSQVARNA LP 9505
17.8 kW, drum width 850 mm,
1675 kg.



HUSQVARNA LP 7505
7.9 kW, drum width 750 mm,
981–1001 kg.



HUSQVARNA LP 6505
7.2 kW, drum width
650 mm, 745–765 kg.

BATTERY PRODUCTS

PACE BATTERY SYSTEM



BATTERY POWER CUTTER

NEW

HUSQVARNA K 1 PACE
7.2/7.4 kg, blade size 300/350 mm, cutting depth 121/144.5 mm.



NEW

HUSQVARNA K 1 PACE RESCUE
7.9 kg, blade size 350 mm, cutting depth 144.5 mm.



DIAMOND BLADES FOR PACE BATTERY POWER CUTTER

NEW

G HUSQVARNA ELITE-CUT S 35 S BAT
Providing a maximum cutting speed and wear resistance in all heavy cutting job. Low vibrations with the continuous rim and silence core.



S HUSQVARNA VARI-CUT FR3
Has one layer of vacuum brazed diamond for fast cutting of a large variety of materials like tiles, stone, rebars, fiber board, PVC pipes and more. Possible to use in standard PC.



NEW

B HUSQVARNA TACTI-CUT S 35 S BAT
Providing a good balance between performance and price in all cutting operation. Low vibrations with the continuous rim and silence core.



B HUSQVARNA ABRASIVE DISCS
Conventional abrasive disc specially recommended to cut metal and rebars possible to use in standard PC.



ACCESSORIES

NEW

HUSQVARNA B380X/B750X PACE
High power PACE batteries equipped with built-in connectivity. Capacity: 375/750 Wh, weight 3/5 kg.



NEW

HUSQVARNA C900X/C1800X
High power battery chargers with a fast charging mode and active cooling. Capacity of 1800 W.



NEW

VAC ATTACHMENT
Ideal dust collection enables you to cut without water.



I-SERIES BATTERY SYSTEM

BATTERY POWER CUTTER

HUSQVARNA K 535i
3.5 kg, blade size 230 mm, cutting depth 76 mm, i-Series battery system.



BATTERY SCREED

HUSQVARNA BV 30i
The battery-powered BV 30i screed is the eco-sensible choice paired with improved ergonomics, easy operation and low maintenance.



DIAMOND BLADES FOR I-SERIES BATTERY POWER CUTTER

G HUSQVARNA ELITE-CUT S 35 S BAT

Providing a maximum cutting speed and wear resistance in all heavy cutting job. Low vibrations with the continuous rim and silence core.



S HUSQVARNA VARI-CUT FR3

Has one layer of vacuum brazed diamond for fast cutting of a large variety of materials like tiles, stone, rebars, fiber board, PVC pipes and more. Possible to use in standard PC.



B HUSQVARNA TACTI-CUT S 35 S BAT

Providing a good balance between performance and price in all cutting operation. Low vibrations with the continuous rim and silence core.



B HUSQVARNA ABRASIVE DISCS

Conventional abrasive disc specially recommended to cut metal and rebars possible to use in standard PC.



BATTERY DRILL MOTORS

NEW

HUSQVARNA DM 540i
1350 W, recommended drill diameter 0.15–75 mm (100 mm with a drill stand), 4.9 kg, i-Series battery system.



BATTERY DUST EXTRACTOR

NEW


HUSQVARNA DE 110i
DE 110i is a versatile and compact H-class dust extractor powered by Husqvarna BLi 36 V batteries.



ACCESSORIES



HUSQVARNA BLi 100/200/300
All-weather operation and excellent cooling. Rechargeable more than 1500 times. 26/5.2/9.4 Ah, 0.8/1.3/1.9 kg.



HUSQVARNA QC330/QC500
Quick charging unit with 2-LED status indicator and active battery cooling for minimum charge time and longer battery life.



NEW

HUSQVARNA WT 15i
220/110 V electric pump. Holds 15 litres. Battery-powered, 36 V.



NEW

HUSQVARNA WL 8i
Extremely durable and powerful battery powered lighting solution – up to 8000 lumen. Easy to carry and position, easy to change from flood light to 360 degree area light using the light diffuser accessory. Built-in power bank with USB outlet to charge mobile devices. Using the tripod accessory gives an adjustable height between 1.35 and 3 m.



VAC ATTACHMENT
Ideal dust collection enables you to cut without water.



HUSQVARNA CONSTRUCTION CATALOGUE FOR iPad

The future is digital, also for this product catalogue. The new iPad app version is the foremost source of product updates from Husqvarna for news-seeking construction professionals. Browse the complete product range, find the latest technical specifications for your favorite Husqvarna equipment and e-mail your order directly to your Husqvarna representative. Download it for free from App Store today!



Construction catalogue available for iPad

HUSQVARNA FLEET SERVICES™ – ADDS EVEN MORE CONTROL

For owners of equipment fleet, an upgrade to Husqvarna Fleet Services™ comes with a number of benefits for the entire operation. With Husqvarna Fleet Services™ you easily create inventory lists and keep track of your machines' status, location and service needs.

Through built-in or add-on connectivity, your machine will be ready to collect and transmit critical information of your equipment to your Husqvarna Fleet Services™ portal for further analysis and decision making.

CONNECT YOUR FLEET TO GET FULL CONTROL OF:

- ✔ Fleet inventory
- ✔ Machine availability
- ✔ Runtime/Utilization rate
- ✔ Service planning

Get your Fleet account at <https://fleetservices.husqvarna.com/signupand> and download the App from App Store or Google Play



PERSONAL EQUIPMENT




OIL AND FUEL CAN

Our range of accessories also include two-stroke oil adapted for a variety of conditions as well as biodegradable air filter oil. Our in-house developed petrol can hold 6 l of petrol and is fitted with an effective level control.



HEARING PROTECTION WITH FM RADIO

Good sound quality and comfortable fit. Equipped with 3.5 mm audio input (AUX) for music player and communication radio. Versions available with headband or helmet mount.



HEARING PROTECTION WITH HEADBAND

Comfortable and lightweight with a flexible padded headband. Design allows for 20% adjustment of pressure. Approved according to current EN standards.



GLOVES, CLASSIC

A one-size durable glove made with a goat leather palm with spandex fabric on the back. Rubberised cuff with cotton binding for a perfect fit around the wrist.



PROTECTIVE GLASSES, CLEAR X

Protective glasses with non-scratch, clear lenses, extendable frames and lenses that can be angled. Approved as per EN 166 and Ansi Z87+.

Husqvarna®

husqvarnacp.com